

# **CUR Filter Housings**

Single Cartridge Industrial Housings

CUR housings, made with 316L stainless steel, are designed for commercial and industrial applications. These single cartridge housings include universal cups to fit multiple cartridge end caps: Double Open End (DOE), 2-222 0-ring/plug and 213 internal O-ring/plug. Every housing is supplied with a mounting kit and sump rod.



Operating Pressure	300 psi (20 bar)
Operating Temperature	200 °F (93 °C)




CUR Single Cartridge Industrial Housing Nominal Lengths – 5 in. to 30 in.

### **Specifications**

Housing Head & Sump	316 Stainless Steel	
O-Rings Options	EPDM (std), Buna, Viton (or FKM), FEP Encapsulated Viton (or FKM)	
Cartridge Seal	DOE (End Cap code "0") 2-222/plug (End Cap code "2")	
Cartriage Sear	213/plug (End Cap code "3")	
Drain with Plug	1/4"	
Spring Loaded Seal	Yes	
Gauge Ports (2)	¼" FNPT	
Inlet/Outlet	1" FNPT	
Mounting Kit and Sump Rod Included	Yes	
Maximum Cartridge Diameter	2 ¾"	

#### **Dimensions**

Model	Nominal Cartridge Length	Overall Height (A)
CUR5	5″	10.6"
CUR1	10"	15.0"
CUR2	20"	25.0"
CUR3	30"	35.0"




## **CUR Single Cartridge Housing Ordering Information**

All Critical Process filter housings are configurable to meet customer specifications. Fill in the corresponding code in the box below to build your Part Number.

To consult with one of our technical team members, request a quote or place an order: call (603) 880-4420 Ext. 106, or send an email to <a href="mailto:sales@criticalprocess.com">sales@criticalprocess.com</a>

#### **CUR Single Cartridge Filter Housing**

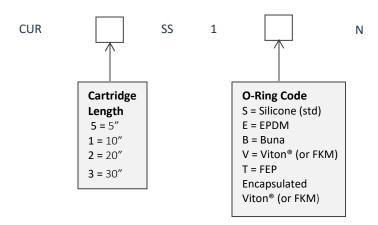

CUR Wrench is available and ordered separately.

Critical Process provides unrivaled delivery times, technical consulting before purchasing, and very competitively priced high-performance products. Our comprehensive testing/analysis and validation services support your team whenever they need it. Your process experts partnering with our filtration experts is how we deliver your company's solution right the first time.



One Chestnut Street Nashua, NH 03060 603.880.4420 FAX: 603.880.4536

CriticalProcess.com

The information contained herein is subject to change without notice. The Critical Process Filtration logo is a trademark of Critical Process Filtration, Inc. Viton is a trademark of DuPont Performance Elastomers L.L.C.

© 2020 Critical Process Filtration, Inc. • All Rights Reserved

Data Sheet CURDS Rev-